



Energy Storage Solution

Power Conditioning System / PCS3000

- 3110-4150 kVA power capacity with 600 VAC
- Scalable system configuration and battery technology independence
- Designed for utility-grade energy storage applications



Utility Grid



Factory



Solar Power



Optimizing the Value & Efficiency of Energy Storage System in Grid Applications

Delta Power Conditioning System (PCS) is a bi-directional energy storage inverter for grid applications including power backup, peak shaving, PV self-consumption, PV smoothing, etc. Delta Megawatt PCS provides power capacity from 3110 to 4150 kVA with

98.4% efficiency. Featuring high availability and adaptability, the PCS is battery technology independent and can control energy storage system exactly when it is required.



Applications




Renewable Power Plant Integration

- Ramp rate control
- Energy shifting
- Smoothing
- Capacity firming




Hybridized Thermal Power Plant

- Black start

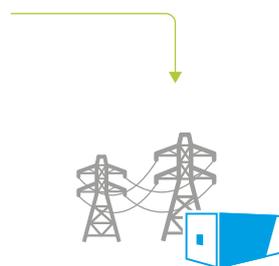

Grid Ancillary Control


- Frequency regulation
- Peak shaving

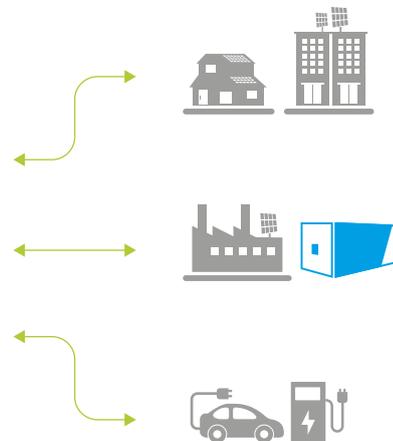

Distributed Network and Microgrid

- Peak shaving

Features



Efficient and Precise Power Control

- Power Capacity: 3110-4150 kVA
- AC Voltage: 600 Vac
- Peak Efficiency: 98.4%



Flexible System Configuration

- Modular design realizes scalability and availability
- Battery independence provide high adaptability for energy storage



Designed for Energy Storage Applications

- Advanced P/Q and Frequency/Voltage
- Utility-grade protection designed for harsh environment
- AC coupled storage application
- Automatic voltage and frequency regulation
- Active and reactive power compensation
- Anti-Islanding detection, islanding control operation

Operating Modes

1. Power Dispatch

Respond to external power demand and meet the system load at the short-term determination.

2. Peak Shaving

Schedule for shaving the peak and avoiding high demand charge once detected consumption overload.

3. Frequency-Watt / Voltage-Watt / Voltage-Var

Monitor grid frequency or voltage continuously and adjust its output power based on the user-configured parameters dynamically.

4. Standalone

With an external UPS supplying emergency power, PCS can black start and continuously provide power from battery to critical loads.

Product at a Glance



Specifications

Part Number	DWE3110-EV-US	DWE4150-EV-US
DC Connection		
Input Voltage VDC Range ⁽¹⁾	875 - 1500 V	
Input Voltage VDC, max	1500 V	
Max. Input Current IDC, max (at 50°C)	3269 A	4359 A
Number of DC Inputs	1/2 (optional)	
AC Connection		
AC Power (25°C / 35°C / 50°C)@ PF=1, 600Vac	3117 kVA / 3117 kVA / 2805 kVA	4156 kVA / 4156 kVA / 3741 kVA
Max. AC Current IAC, max (25°C / 35°C / 50°C)	3000A / 3000A / 2700A	4000A / 4000A / 3600A
Max. Total Harmonic Distortion ⁽²⁾	< 3% at full load	
Nominal AC Voltage	600 V	
AC Power Frequency	60 Hz	
Power Factor (depending on voltage)	0 to 1 leading or lagging	
Performance		
Max. Efficiency ⁽³⁾	98.4%	
CEC Efficiency	98%	
Standby Loss ⁽⁴⁾	< 350 W	
Protection		
Input-side DC	DC switch + fuses	
Output-side AC	AC circuit breaker	
DC Overvoltage	Surge arrester, class II	
AC Overvoltage	Surge arrester, class II	
Ingress Protection	Type 4X	
General		
Dimensions (W x H x D)	4450 × 2300 × 1650 mm / 175 × 90.5 × 65 inches	
Weight	5830 kg / 12853 lbs	6330 kg / 13955 lbs
Power Module	3	4
Environment		
Operating Temperature	-30°C to +60°C, de-rating > 50°C	
Storage Temperature	-40°C to +70°C	
Relative Humidity	5 to 100% RH	
Altitude	< 3000 m, de-rating > 2000 m	
Acoustic Noise ⁽⁵⁾	< 85 dB(A)	
Cooling	Liquid cooling (integration)	
Compliance		
Safety	UL 1741	
EMC	FCC class A	
Grid Interconnection	IEEE 1547	

* This is a draft version and subject to change based on customer's final specification.

* Specifications are subject to change without prior notice.

(1) Consult Delta for derating curves

(2) I_{thd} measured under grid short current ratio ≥ 5

(3) Efficiency measured without internal auxiliary power loss

(4) Standby loss measured under external power supply

(5) Noise measured at the distance of 3m



Delta Electronics (Americas), Ltd.

46101 Fremont Blvd, Fremont, CA 94538, U.S.A.

Sales : (510) -668-5118 / Support : (877) 442-4732

PCS@deltaww.com

More information

www.delta-americas.com



2022/07